

Job Name:	
Submitted By:	



Submittal Sheet For:	WT024GLSI25HLH / YN024GLSI25RPH
----------------------	--

Date _____

Ref. _____

Wall-Mounted Ductless 22SEER Inverter Heat Pump

System Full Set Model: **WYT024GLSI25RH**

AHRI Reference Number: **217048757**

Cooling Mode Performance

Rated Cooling	24,000 BTU/hr
Ambient Range	5~131°F
SEER2 Rating	23 BTU/W·h
EER2 Rating	12 BTU/W·h

* 100% Capacity @ Indoor DB 80°F / WB 67°F

Heating Mode Performance

Rated Heating	24,000 BTU/hr
Ambient Range	-22~86°F
HSPF2 IV (V)	10 (8.6) BTU/W·h
COP2 (47°F)	3.3 W/W

Low Heat (17°F) = 15,500 BTU / COP2 (5°F) = 1.8 W/W



Wall-Mounted Indoor Unit



Outdoor Condensing Unit



User-Selected Installation Kit



Handheld Remote Controller

Electrical Information

Rated Input (W)	Cooling	Heating
	1,860	2,000
Rated Current (A)	8.3	9.0
Breaker Needed	30A (Double-Pole)	
Power Supply	208~230V, 1Ph, 60Hz	

Piping and Refrigerant

Liquid Line (OD)	1/4 in
Suction Line (OD)	5/8 in
Refrigerant Precharge	R-454b(Supports 10-50ft.)
Max Length/Height Diff.	65 ft. / 50 ft.

This combination is
Energy-Star certified.






Interior Unit (Air Handler) Specifications

Type	Heat Pump
Sound Level (dBA)	49 (Turbo) / 47 (Hi) / 42 (Med) / 37 (Lo) / 32 (Mute)
Auto Air Circulation	2-Way Louver (Up-Down + Left-Right)
Dimensions (WDH)	43-1/8 in x 8-3/4 in x 13-1/8 in
Weight (lbs)	30.9


Exterior Unit (Condenser) Specifications


Sound Level (dBA)	61
Recommended Room Size	750~1,000 Sq. ft.
Minimum Room Size	63 Sq. ft.
Compressor	Inverter-Driven Rotary
Dimensions (WDH)	38-1/2 in x 16-5/8 in x 31-5/8 in
Weight (lbs)	108

WT024GLSI25HLH Air Handler Dimensional Data

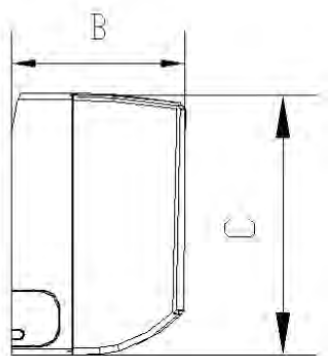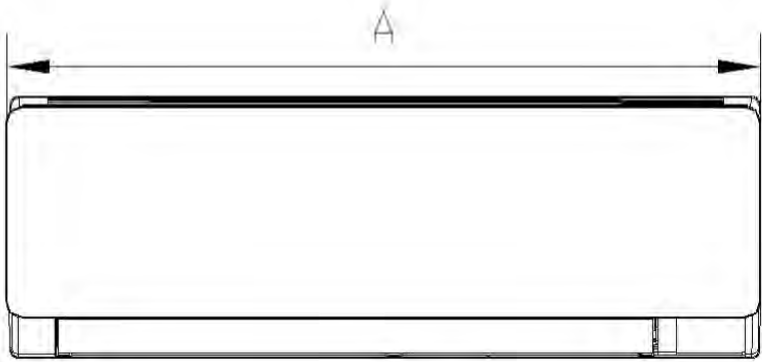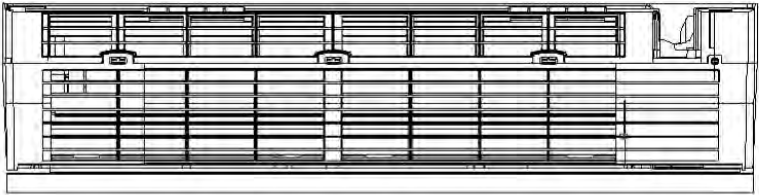


Model	A	B	C
WT024GLSI25HLH	43-1/8 in	8-3/4 in	13-1/8 in
	1,096 mm	222.3 mm	334 mm

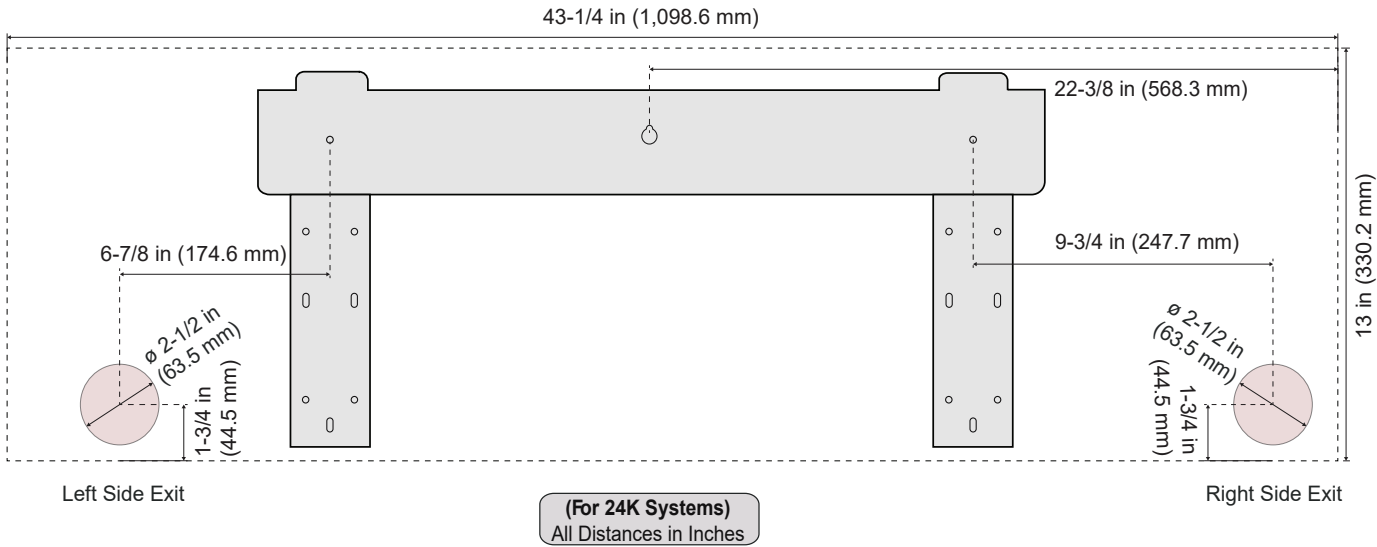


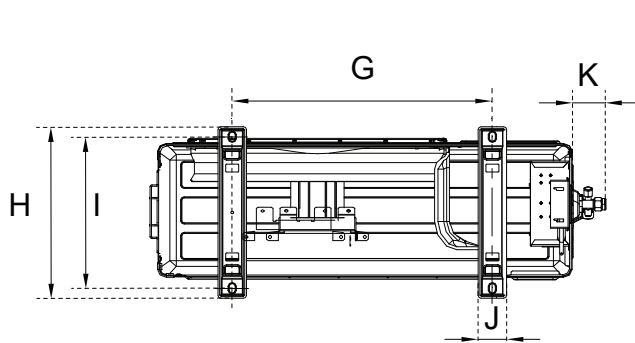

Underside View

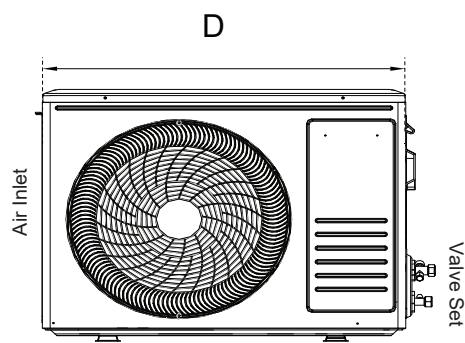

Front View



Side View

Model	D	E	F	G	H	I	J	K
YN024GLSI25RPH	35-7/8 in	31-5/8 in	13-7/8 in	23-7/8 in	16-5/8 in	15-3/8 in	2-1/2 in	2-1/8 in
	910 mm	804 mm	353 mm	607 mm	421 mm	390 mm	63 mm	54 mm

Warranty Information and Length



Complete warranty details are available with the vendor or online at <https://www.pdhvac.com/support/warranty/>. This high quality system is eligible for up to 10 years limited warranty on the compressor, and 7 years on other internal parts. To qualify for this warranty, the system must be installed within 90 days by a registered technician. All other installations that are registered default to 5 years parts/compressor. Products unregistered qualify for only 1 year parts/compressor warranty.

Outstanding Features

- LED Display
- Energy Saving
- Ultra-Thin Design
- Dual Drain Options
- Customizable Timer
- Eco-Friendly Refrigerant
- Whisper-Quiet Operation
- Power Loss Memory Recovery



Available Accessories

Part Number	Description
IKT-LCVR4P-KIT	Decorative PVC Line Cover Kit
IKT-LNBR-1/4-3/8	BendAid Flexible Easy Bender Kit
BRK-FRM-C-2P	Folding Mounting Bracket w/ Leveler
IKT-UVL32UL-AG	UVC Bacterial Disinfection Kit
IKT-SURPRK-DV2	Ultimate Surge and Power Protection